


## UNTREATED FUMED SILICA



# CAB-O-SIL® EH-5

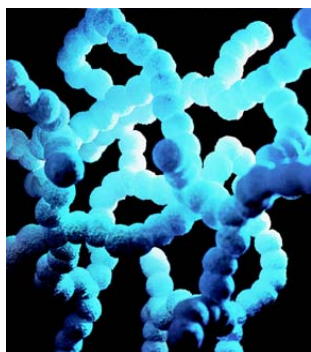

**CAB-O-SIL® EH-5** untreated fumed silica is a synthetic, amorphous, colloidal silicon dioxide that is generally regarded as unique in industry because of its unusual particle characteristics. CAB-O-SIL® fumed silica's extremely small particle size, its enormous surface area, its high purity, and its chain-forming tendencies set it apart in a class of its own. CAB-O-SIL® fumed silica is a light, fluffy powder that is white in appearance and is used in many applications and in a variety of industries.

### Product Form

Powder

### Typical Properties

B.E.T. Surface Area	380 m <sup>2</sup> /g
pH (4% aqueous slurry)	3.7 – 4.3
325 Mesh Residue (44 microns)	0.02% max.
Tamped Density	50 g/l
Loss on Heating*	< 1.5%
Specific Gravity	2.2 g/cm <sup>3</sup>
Wt. per gallon	18.3 lb
Refractive Index	1.46
X-ray Form	Amorphous
Assay (% SiO <sub>2</sub> )	> 99.8
Oil Adsorption	~300-350 g/100 g oil
Average Particle (Aggregate) Length	0.2 – 0.3 microns

\*At time of packaging.



**Functions**

Rheology Control  
Reinforcement  
Free Flow  
Suspension  
Adsorbant

**Applications**

Adhesives & Sealants  
Coatings  
Cosmetics  
Foods  
Inks

**Packaging Options**

CAB-O-SIL® fumed silicas are packaged in color-coded, multi-wall Kraft paper bags. Grade EH-5 is packaged in North America in 10-lb bags and in Europe in 10 kg. bags. The bags are unitized and sized to provide product protection, facilitate efficient handling, and maximize payloads. Specific information regarding standard and custom packaging may be obtained by contacting a sales service representative at the Cabot Corporation office in your region.

**MSDS**

A Material Safety Data Sheet for this product may be obtained by contacting the Cabot Corporation office in your region or visiting our website.

This information is provided as a convenience and for informational purposes only. No guarantee or warranty as to this information, or any product to which it relates, is given or implied. This information may contain inaccuracies, errors or omissions and CABOT DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AS TO (i) SUCH INFORMATION, (ii) ANY PRODUCT OR (iii) INTELLECTUAL PROPERTY INFRINGEMENT. In no event is Cabot responsible for, and Cabot does not accept and hereby disclaims liability for, any damages whatsoever in connection with the use of or reliance on this information or any product to which it relates.

**NORTH AMERICA**

Cabot Corporation  
Business and Technical Center  
157 Concord Road  
Billerica, MA 01821-7001  
USA  
Customer Service:  
Phone: (800) 526-7591  
Technical Service:  
Phone: +1 (978) 663-3455  
Phone: (800) 462-2313  
Fax: +1 (978) 670-6167

**EUROPE**

Cabot  
Interleuvenlaan 15 I  
B-3001 Leuven  
BELGIUM  
Tel: +32 16 39 24 00  
Fax: +32 16 39 24 44

**ASIA/ PACIFIC**

Cabot Specialty Chemicals  
Level 21 MNI Tower 2  
11, Jalan Pinang  
50450 Kuala Lumpur  
MALAYSIA  
Phone: +60 3 2164 8352  
Fax: +60 3 2161 0253  
Cabot Specialty Chemicals  
Shiba Boat Bldg. 5F  
3-1-15 Shiba, Minato-ku  
Tokyo 105-0014  
JAPAN  
Phone: +81 3 3457 7354  
Fax: +81 3 3457 7658

**SOUTH AMERICA**

Cabot Latin America Division  
Rua do Paraíso, 148 - 5º andar  
CEP 04103-000, São Paulo  
SP BRAZIL  
Customer Service:  
Phone: +55 11 2144 6400  
Fax: +55 11 3253 0051

**MIDDLE EAST/ AFRICA**

Cabot Specialty Chemicals  
Jebel Ali Free Zone  
LOB 15, Office 424  
Dubai  
UNITED ARAB EMIRATES  
Phone: +971 4 8871 800  
Fax: +971 4 8871 801